


Vacuum Generators (with Silencer)


(Shown Actual Size)

These vacuum generators are made of aluminum, making them lightweight and suitable for mounting directly on your end-of-arm tooling. Use these when you need to add a simple vacuum circuit. The vacuum on/off function is controlled by switching the compressed air on/off. They have no moving parts, are maintenance free, and have silencers built in. Operating temperature range is from 14°–176°F. Operating pressure range is: 43.5–94.3 psi.

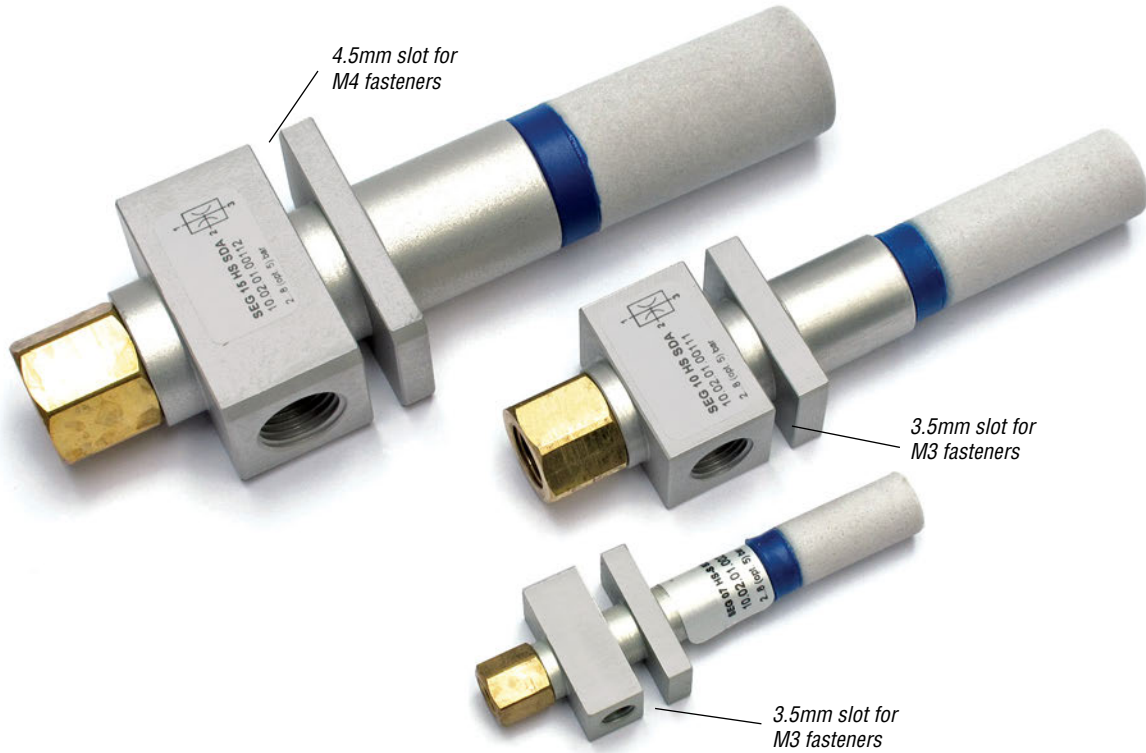

Quick#	Part#	Price	Max Vacuum Level*	Max Suction Flow*	Air Consumption*	Standard Supply Pressure	Max Operating Pressure	Thread	Overall Length	Wt
361	GSV-VG-056	\$63.75	82%	0.57 SCFM	0.74 SCFM	72.5 psi	87 psi	M5	64.5mm	11g
362	GSV-VG-119	\$73.00	85%	1.20 SCFM	1.73 SCFM			G1/8"	97mm	50g
363	GSV-VG-242	\$88.00	85%	2.44 SCFM	3.60 SCFM			G1/4"	121mm	110g

*Values listed are achieved when supplied the listed standard supply pressure.

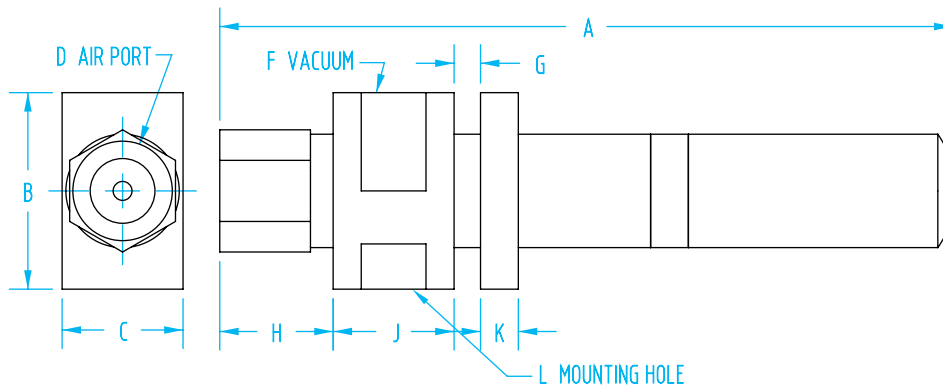

	A	B	C	D	F	G	H	J	K	L
361	51	20	10	M5	M5	3.5	10	8	3.5	M5x6
362	97	26	16	G1/8"	G1/8"	3.5	15	16	5	-
363	121	38	22	G1/4"	G1/4"	4.5	21	20	5	-