


Vacuum Generators (with Silencer)

(Shown Actual Size)

These vacuum generators are made of aluminum making them lightweight and suitable for mounting directly on your end-of-arm tooling. Use these when you need to add a simple vacuum circuit. The vacuum on/off function is controlled by switching the compressed air on/off. They have no moving parts, are maintenance free, and have silencers built in. Operating temperature range is from 14°–176°F. Operating pressure range is: 43.5–94.3 psi.



Quick#	Part#	Suction Capacity	Max. Vacuum	Air Consumption	Fitting Ports	Recommended Tubing ID (Vacuum Port)	Weight	Price
361	GSV-VG-056	0.5 SCFM	82%	0.7 SCFM	M5	2.5mm	11g	\$48.15
362	GSV-VG-119	1.2 SCFM	85%	1.7 SCFM	G1/8"	4mm	50g	\$55.20
363	GSV-VG-242	2.4 SCFM	85%	3.6 SCFM	G1/4"	6mm	110g	\$66.41

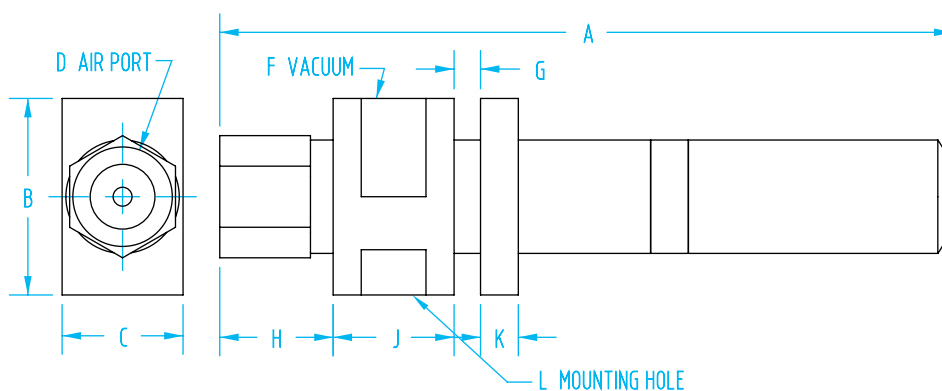

	A	B	C	D	F	G	H	J	K	L
361	51	20	10	M5	M5	3.5	10	8	3.5	M5x6
362	97	26	16	G1/8"	G1/8"	3.5	15	16	5	-
363	121	38	22	G1/4"	G1/4"	4.5	21	20	5	-