


Clampable Rotating Cylinder – ZHS

(Dimensioned drawings shown full scale)



- Single acting, spring return.
- Available with rotative or non-rotative with Ø20mm clampable body.
- Apply compressed air to the G1/8" port to extend cylinder.
- The rod-end has a M8 thread to accept an adapter to install a vacuum cup or pressure plate.
- To push or clamp parts, use a DPL pressure plate (Q#3440, page 769) with adaptor (#3300, page 769), and a G1/8" to M5 reducer (Quick# 224, page 1069).
- Sensing capable, bands and sensors sold separately.

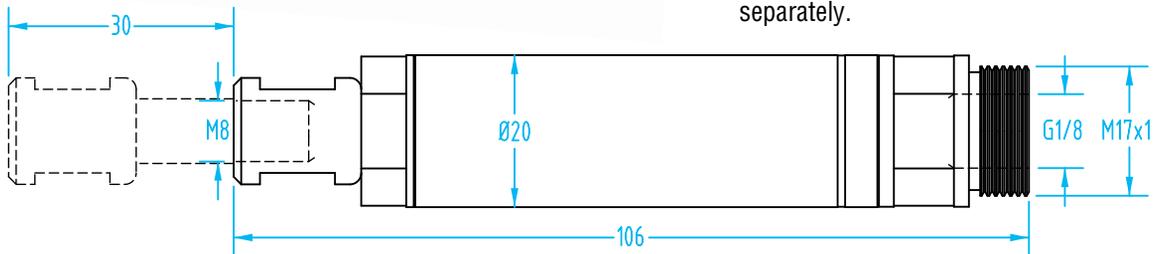

NEW

Quick#	Part#	>ASS< #	Syle	Stroke	Extension Force*	Ø	Price	Wt.
3900	ZHS-20-30	1-776-000-00	Rotative	30mm	20.23 lbf	20mm	\$185.85	62g
3375	ZHS-20-30-VG	1-776-00-00-1	Non-Rotative				\$185.85	62g

*Note: Force at 87psi (6 bar)

Sensor Band

Quick#	Part#	Ø	Price
7308	SWP-020	20mm	\$2.22

Note: Use with D-M9.. SMC sensors on page 1004 or Gimatic SS or SN series sensors on page 1002.

Application Example



#3300 Manifold adaptor M3 to M5

