

MS Nippers

Square Mounting Surfaces

The square mounting surfaces of these Nile® nippers allow them to be easily mounted to an EOAT or to a degating station. Air ports on both the bottom and sides of the nipper body allow a wide choice of positioning options.


Single-acting, spring return and reset allows simple valving.



MS Nippers - (Order blades separately)


Quick#	Part#	Price	Sprue Ø Cut	A	Body (Square)	Cutting Pressure	Working Air Pressure	Port	Weight
1670	GSN-MS-5	\$181.00	2mm	74	30	88 lbf	57-71 psi	G1/8"	160g
1671	GSN-MS-10	\$164.50	4mm	93	36	132 lbf	57-71 psi	G1/8"	260g
1672	GSN-MS-20	\$217.00	7mm	109	45	308 lbf	71-85 psi	G1/8"	430g
1673	GSN-MS-30	\$277.00	10mm	150	56	617 lbf	71-85 psi	G1/8"	810g

Order Blades Separately
See pages 858-890.



MS Nippers - dimensions

Quick#	Part#	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	ØQ	R
1670	GSN-MS-5	74	30	30	14	19	24	20	20	20	M4x10	M3x6	4.3	20	7	7	30	55
1671	GSN-MS-10	93	36	30	18	23	28	28	20	24	M4x10	M4x6	4.3	20	9	7	36	65
1672	GSN-MS-20	109	45	40	19	24	36	30	20	30	M5x12	M4x8	5.3	26	12	9	45	81
1673	GSN-MS-30	150	56	60	20	30	46	40	20	40	M6x12	M5x11	5.3	36	17	15	56	110

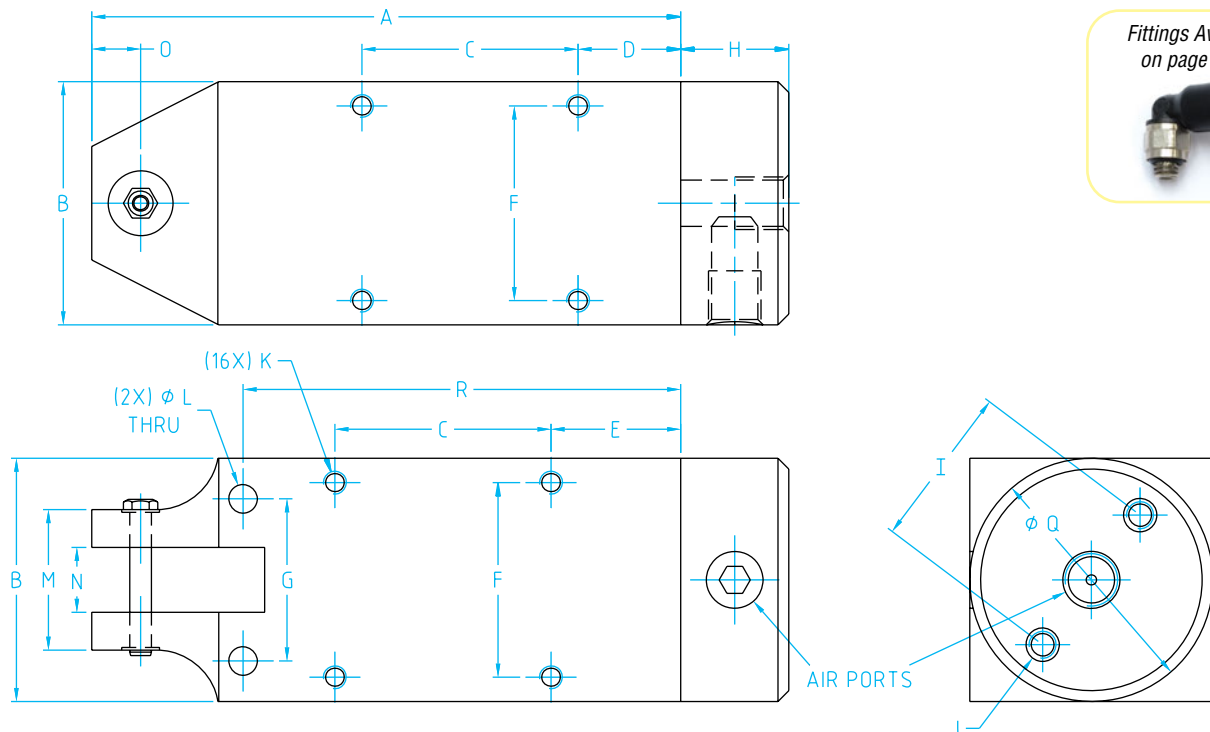

Fittings Available
on page 1043



Double-Acting Nippers



Double-Acting Nippers

Double-Acting Nippers –

Positive open, positive close, double-acting nippers provide the highest reliability with minimal downtime.

Double-Acting Nippers - (Order blades separately)

Quick#	Part#	Price	Sprue Ø Cut	A	Body (Square)	Cutting Pressure	Working Air Pressure	Port	Weight
1818	GSN-MS-5V	\$289.00	2mm	92	30	88 lbf	57-71 psi	M5	185g
1819	GSN-MS-10V	\$297.00	4mm	116	36	132 lbf	57-71 psi	R1/8"	345g
1820	GSN-MS-20V	\$359.00	7mm	147	45	308 lbf	71-85 psi	R1/8"	650g
1821	GSN-MS-30V	\$529.00	10mm	185	56	617 lbf	71-85 psi	R1/8"	1150g

Order Blades Separately
See pages 858-890.



Double-Acting Nippers - dimensions

Quick#	Part#	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P
1818	GSN-MS-5V	92	30	30	32	37	24	20	18	M3x6.5	4.3	20	7	7	30	72	M5
1819	GSN-MS-10V	116	36	30	41	46	28	28	23	M4x6.5	4.3	20	9	7	36	88	G1/8"
1820	GSN-MS-20V	147	45	40	57	62	36	30	31	M4x8	5.3	26	12	9	45	119	G1/8"
1821	GSN-MS-30V	185	56	60	55	65	46	40	33	M5x11	5.3	36	17	15	56	145	G1/8"

Fittings Available
on page 1043

