


Suction cups / FDA-compliant silicone

VG.LB42F bellows suction cups in FDA-compliant silicone

- Food-grade silicone compound (FDA-approved)
- Suitable for high working temperatures
- Enables to compensate for height differences and work with uneven or porous surfaces
- Ideal for leafing through and picking up fine items



Application example

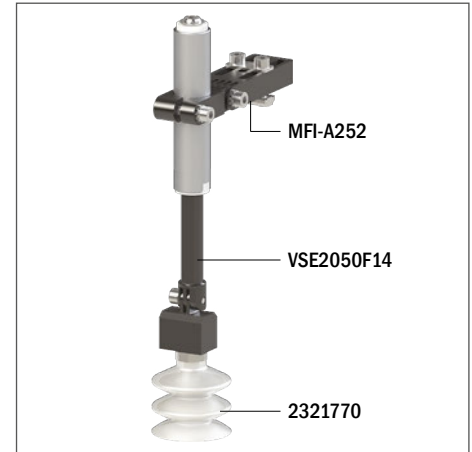

Technical data


Material	Lifting force [N] perpendicular to the surface, at various vacuum levels			Lifting force [N] parallel to the surface, at various vacuum levels			Volume [cm ³]	Min curve radius [mm]	Max vert. movement [mm]	Suction cup weight [g]
	-20 kPa	-60 kPa	-90 kPa	-20 kPa	-60 kPa	-90 kPa				
SIL 50 FDA	25.2	70.2	85.5	—	—	—	19	75	20	15.8

Technical features

Material	Color	Hardness	Temperature range
Silicone, FDA SIL	Transparent	50 Shore	-94 - +392 °F

Identification codes

Drawing	Alphanumeric code	Suction cups with fitting	Order code
A	VG.LB42F.50.G18F.E12	VG.LB42 suction cup, FDA-compliant silicone, 50 Shore, G1/8" female, 12 mm hex	2321764
B	VG.LB42F.50.G18M.E12	VG.LB42 suction cup, FDA-compliant silicone, 50 Shore, G1/8" male, 12 mm hex	2321766
C	VG.LB42F.50.G18F.E16	VG.LB42 suction cup, FDA-compliant silicone, 50 Shore, G1/8" female, 16 mm hex	2321767
D	VG.LB42F.50.G18M.E16	VG.LB42 suction cup, FDA-compliant silicone, 50 Shore, G1/8" male, 16 mm hex	2321768
E	VG.LB42F.50.G14F.E16	VG.LB42 suction cup, FDA-compliant silicone, 50 Shore, G1/4" female, 16 mm hex	2321769
F	VG.LB42F.50.G14M.E17	VG.LB42 suction cup, FDA-compliant silicone, 50 Shore, G1/4" male, 17 mm hex	2321770

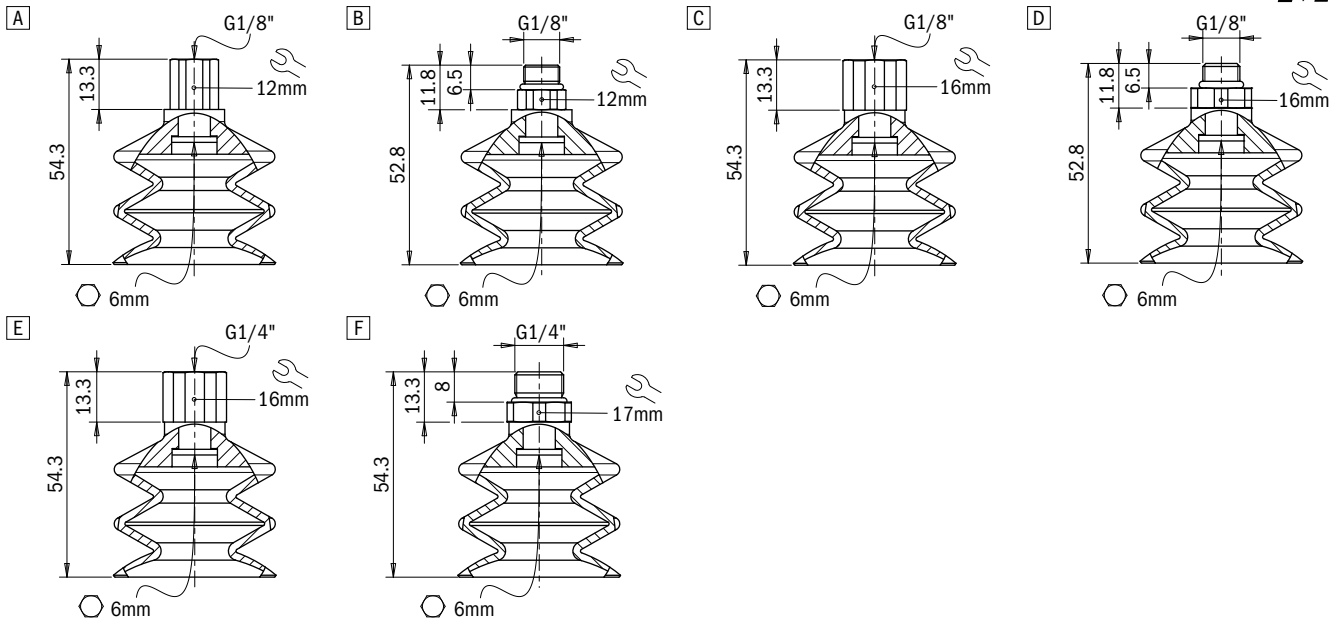


Identification codes

Drawing	Alphanumeric code	Suction cups	Order code
A	VG.LB42F.50	VG.LB42 suction cup, FDA-compliant silicone, 50 Shore	2321765



Click for Pricing & Add to Cart

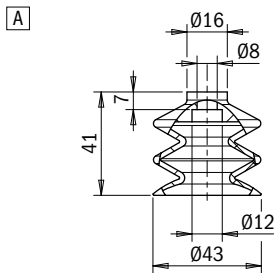

Identification codes

Drawing	Alphanumeric code	Fittings	Order code
A	FT.G18F.E12	G1/8" female fitting, 12 mm hex	2321422
B	FT.G18M.E12	G1/8" male fitting, 12 mm hex	2321424
C	FT.G18F.E16	G1/8" female fitting, 16 mm hex	2321426
D	FT.G18M.E16	G1/8" male fitting, 16 mm hex	2321428
E	FT.G14F.E16	G1/4" female fitting, 16 mm hex	2321430
F	FT.G14M.E17	G1/4" male fitting, 17 mm hex	2321432

