

SECTION III. ASSEMBLY & INSTALLATION INSTRUCTIONS CON'T.

Belt Tracking

Proper belt tracking is very important to the life of the belt. Even conveyors with vee-guide have to be monitored for proper belt tracking. If a belt is left to run improperly tracked, the belt can rub against the frame causing damage to the edges of the belt, or cleats can rub against the side rails causing them to break or tear loose from the belt. Also, the vee-guide on the back of the belt can be worn or torn from the belt due to improper tracking.



Do not leave foreign articles laying on the conveyor. They could cause injury by distracting or hitting the operator. They could cause the equipment to malfunction by shorting an electrical circuit or jamming the equipment.


Before turning the conveyor on, make sure it is cleared of anyone or anything that might be on the conveyor. Determine the adjustment points on your conveyor. Tracking on the drive end can be accomplished by either tightening or loosening the adjustment opposite the motor.

(Fig. 14)

(Fig. 14)



(Fig. 15)

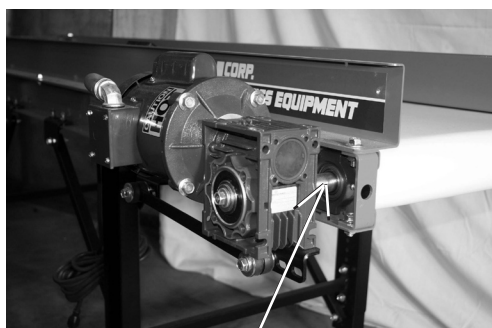


*Shown With Reducer Cover
Guard Removed*

NEVER use the motor side at the drive end for belt tracking. Guard should be kept in place at all times.

(Fig. 15)


SECTION III. ASSEMBLY & INSTALLATION INSTRUCTIONS CON'T.

Belt Tracking, Con't.

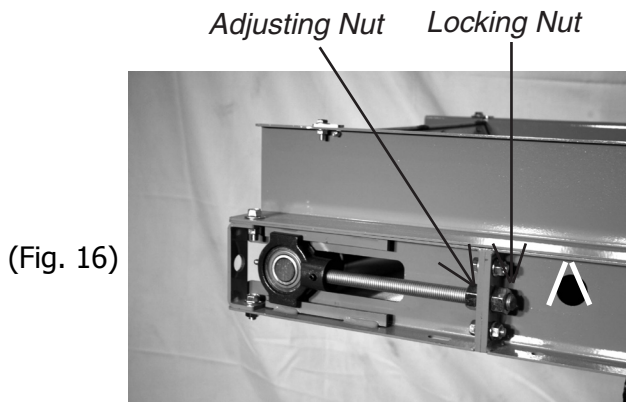

On the tail pulley end (pulley opposite drive end), the belt can be tracked from either side of the conveyor. Belt tension should determine if you track the belt by loosening or tightening the adjusting bolt at this end of the conveyor. Too much belt tension can damage conveyor components. If the belt is running off toward the motor on the drive end, loosen the adjusting bolt to let the belt track back over. If the belt is running toward the opposite side of the motor on the drive end, tighten the adjusting bolt to force the belt back over. (Fig. 16)

The belt is properly tensioned when it will pull a 150# load on the belt without slipping on the drive pulley. This weight limit pertains to an RM conveyor.

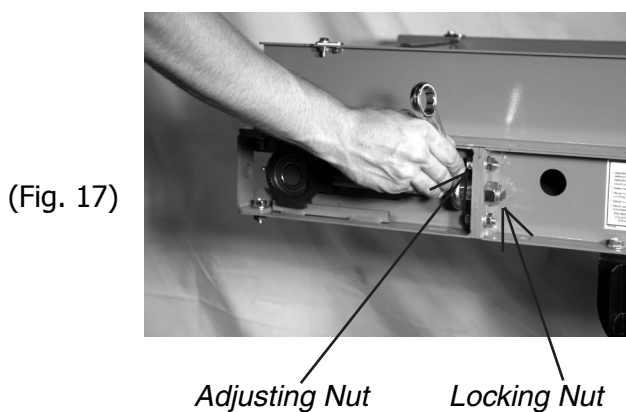

ANY adjustment should be done GRADUALLY. If the belt is running off to one side at the tail end of the conveyor, you can either tighten the side that it is running toward to force the belt back over, or loosen the opposite side to let the belt track back over. Again, belt tension will determine which side to adjust. (Fig. 17)

After any adjustments are made for tracking the belt, let the conveyor make 5 to 10 complete revolutions and check the belt again. Slight movement of the belt position is acceptable if there is no continued drift in one direction.

SECTION III. ASSEMBLY & INSTALLATION INSTRUCTIONS CON'T.

Belt Tracking, Con't.




WARNING:

NEVER over-tighten the belt. Too much tension will damage conveyor components. In the case of a KKI or KK conveyor, too much tension will cause the belt to pop up out of the transition area.

Belt tracking should be closely monitored for the first day of conveyor operation. Watch for any wear on the belt, such as lacing wearing from rubbing the side rails, or the vee-guide trying to crawl up on the pulley. Also, check to make sure that the product you are conveying is compatible, such as; sticking to the belt, getting caught under the rails or between cleats and rails, or under the belt. Product getting caught in the conveyor will damage the belt and conveyor components.

(Fig. 18)

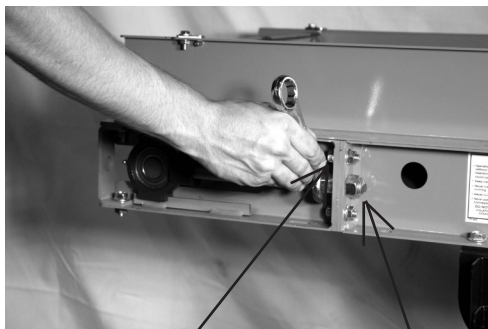

Adjusting Nut

Locking Nut

After the belt has been monitored for proper tracking, tighten the nut on the adjusting rod to lock it into place. (Fig. 18)