

**Slot adapters**

- Kit of fiberglass-reinforced nylon slot adapters.
- Models for C-, T- and dovetail slots.





K-SENS


Dimensions	Materials	Application	Slot
<p><b>SS.004.000</b></p>	PA		
<p><b>SS.007.000</b></p>	PA		
<p><b>SL.004.001</b></p>	PA		
<p><b>SS.005.000</b></p>	PA		

## NO LED sensors

- Reed sensors without output-enabled indicator light.
- No problems in case of vibrations.
- Cable, M8 or SNAP connector output.
- 100% traceability.
- Standard C-slot or T-slot inline mounting.
- Optional slot adaptors.
- Optional 2.5m, 5m and 10m cable extensions.
- Axial or vertical mounting.

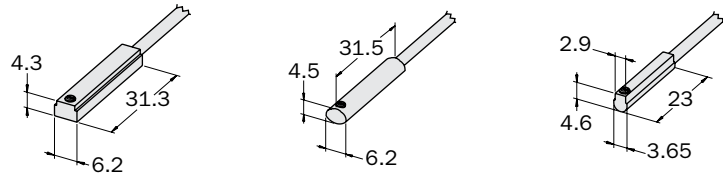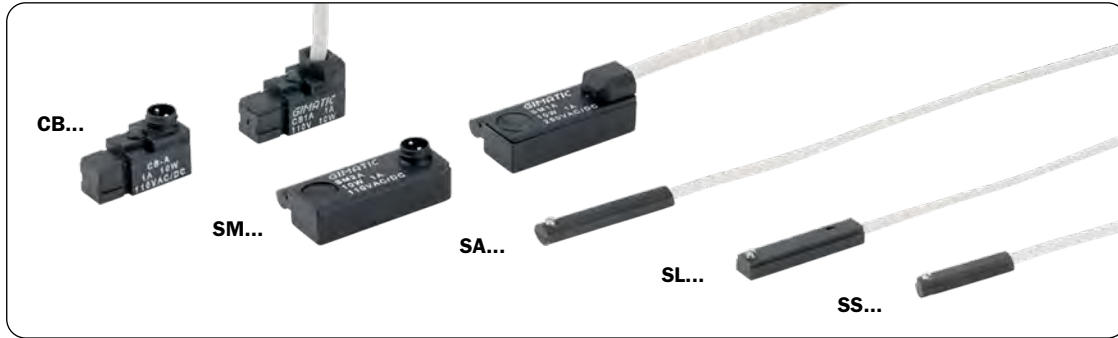

Sensor with cable	<b>SL1A525-G</b>	<b>SA1A525-G</b>	<b>SS1A425-G</b>
Sensor with M8/SNAP connector	<b>SL2A503-G</b>	<b>SA2A525-G</b>	<b>SS2A403-G</b>

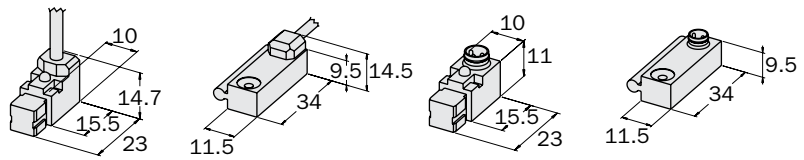

Sensor with cable	<b>CB1A425-G</b>	<b>SM1A525-G</b>	<b>CB1B425-G</b>	<b>SM1B525-G</b>
Sensor with M8/SNAP connector	<b>CB2A4-G</b>	<b>SM2A5-G</b>	<b>CB2B4-G</b>	<b>SM2B5-G</b>

*Dimensions (mm)*

## Application examples

