Foam Gripper / FGS with fine pitch and self-closing valves

FGS-120-0600

- The FGS-120 series of VACUUM FOAM GRIPPERS represents a modular and versatile solution for handling different products with different sizes, shapes and porosity
- Integrated EJ-LARGE-HF-3 multistage cartridges for high suction flow rate and low energy consumption
 The version with self-closing valves is ideal in applications where objects with different sizes/shapes
- need to be handled. It allows the user to work with smaller vacuum pumps, reducing consumption while maintaining a high level of vacuum, even when most of the gripper surface area is not engaged




Technical features				
Max feed pressure	0.6 MPa			
Temperature range	0 ÷ +50 °C			
Weight	5.65 ÷ 5.77 kg			
Material	AI, EPDM, NBR, PA12			
Noise level	70 dB			

Suction flow rate											
Model	Feed pressure	Air consumption	Suction flow rate [NI/s] at different vacuum levels [kPa] Max vacuur						Max vacuum		
	[MPa]	[NI/s]	0	-10	-20	-30	-40	-50	-60	-70	[kPa]
FGS-120-0600-F20-OT-VA-EJL4XX	0.6	6.8	23.6	14	10	6.8	3.56	2.48	2.04	1.24	-73
FGS-120-0600-F20-OT-VA-EJL6XX	0.6	10.2	34	21	15.6	10.2	5.4	3.6	2.9	2	-73

Gripping force								
Model	Gripping force [N] at different vacuum levels							
	-30 kPa	-40 kPa	-50 kPa	-60 kPa	-70 kPa			
FGS-120-0600-F20	567	756	945	1134	1323			

Theoretical gripping force on flat surface, with fully covered gripping surface, safety factor excluded Standard foam thickness: 20 mm



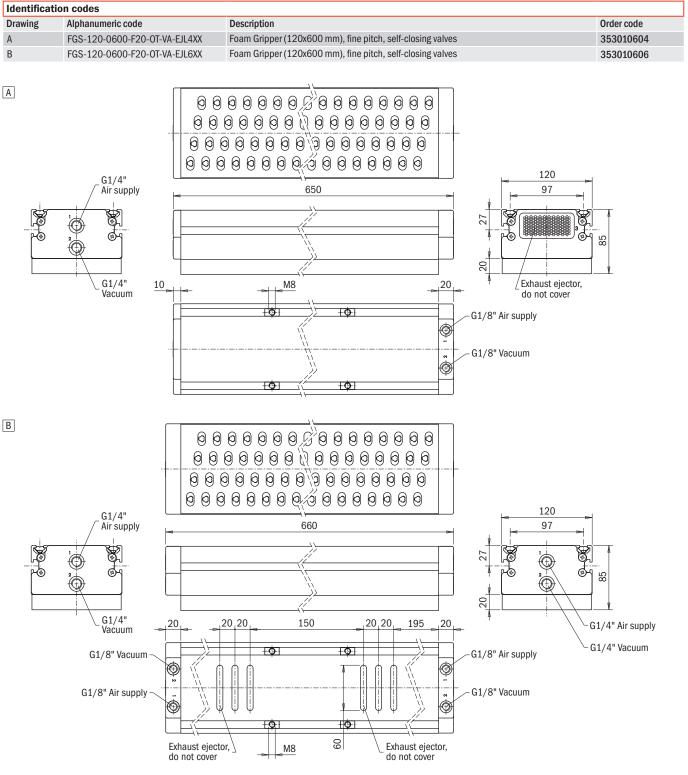

Identification codes							
Alphanumeric code	Spare parts	Order code					
FGS-120-0600-F20-0T	Foam Gripper (120x600 mm), 20 mm-thick foam, fine pitch	353012006					

