
Foam Gripper / FGS with fine pitch and self-closing valves

FGS-120-0800

- The FGS-120 series of VACUUM FOAM GRIPPERS represents a modular and versatile solution for handling different products with different sizes, shapes and porosity
- Integrated EJ-LARGE-HF-3 multistage cartridges for high suction flow rate and low energy consumption
 The version with self-closing valves is ideal in applications where objects with different sizes/shapes
- need to be handled. It allows the user to work with smaller vacuum pumps, reducing consumption while maintaining a high level of vacuum, even when most of the gripper surface area is not engaged

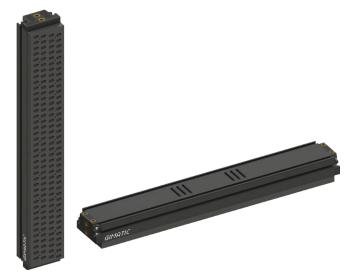


Technical features	
Max feed pressure	0.6 MPa
Temperature range	0 ÷ +50 °C
Weight	7.5 kg
Material	AI, EPDM, NBR, PA12
Noise level	70 dB

Suction flow rate											
Model	Feed pressure	Air consumption	Suction flow rate [NI/s] at different vacuum levels [kPa] Max v						Max vacuum		
	[MPa]	[NI/s]	0	-10	-20	-30	-40	-50	-60	-70	[kPa]
FGS-120-0800-F20-0T-VA-EJL6XX	0.6	10.2	34	21	15.6	10.2	5.4	3.6	2.9	2	-73
FGS-120-0800-F20-0T-VA-EJL8XX	0.6	13.6	47	26	20.8	11.8	7.1	4.5	2.9	2	-73

Gripping force							
Model	Gripping force [N] at different vacuum levels						
	-30 kPa	-40 kPa	-50 kPa	-60 kPa	-70 kPa		
FGS-120-0800-F20	730	981	1227	1472	1712		

Theoretical gripping force on flat surface, with fully covered gripping surface, safety factor excluded Standard foam thickness: 20 mm



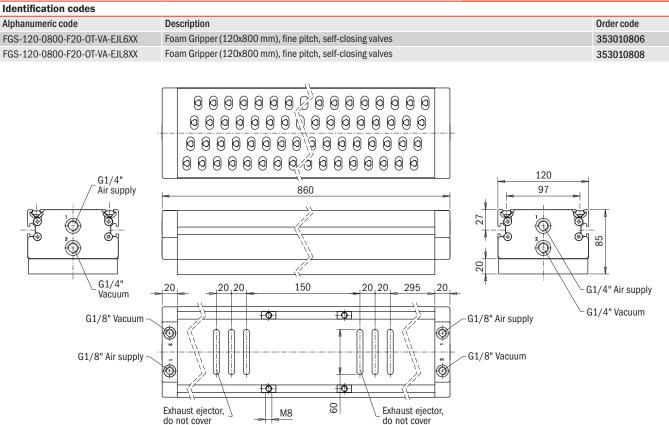

Identification codes						
Alphanumeric code	Spare parts	Order code				
FGS-120-0800-F20-0T	Foam Gripper (120x800 mm), 20 mm-thick foam, fine pitch	353012008				

