


# Barbed Fittings

(Shown Actual Size)

## Barb Fitting Reference

Use Soft Polyurethane tubing with barbed fittings. Soft PU tubing's extra elasticity provides a snug fit against the barb stem.




Throughout your system, it is recommended to be consistent in using soft polyurethane tubing with barb fittings **OR** polyurethane tubing with push-in fittings. However, integrating some barbed fittings in a primarily push-in system can provide acceptable results.

*Note: Using soft polyurethane tubing with push-in fittings gives unacceptable results.*

### Application for Soft Polyurethane Tubing

Stem øOD range	Soft PU øID	Soft PU øOD
2.5–3.0	2.4	4
3.8–4.6	4	6
5.5–6.4	5	8

[Reference Compatibility Chart on page 1039 for more information.](#)

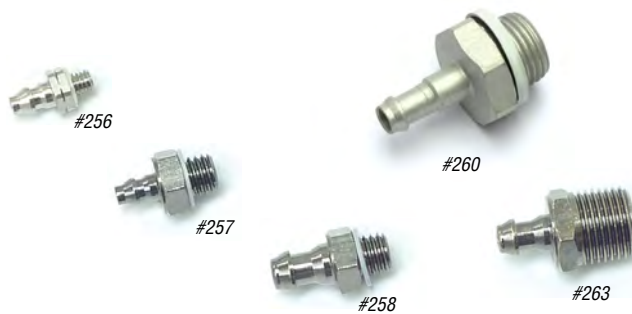

### Barb Straight Fitting

Quick#	Part#	Thread	Stem øOD	Tube øID	Price
256	GSF-BS-M304	M3	2.7	2.4	\$1.29
257	GSF-BS-M504	M5	2.7	2.4	\$0.67
258	GSF-BS-M506	M5	3.8	4	\$0.77
259	GSF-BS-G804	G1/8"	3.0	2.4	\$2.52
260	GSF-BS-G806	G1/8"	4.0	4	\$2.52
261	GSF-BS-G808	G1/8"	6.4	5	\$2.52
262	GSF-BS-R804	R1/8"	2.7	2.4	\$1.16
263	GSF-BS-R806	R1/8"	3.8	4	\$1.16

*Note: Male R1/8 fits Female G1/8.*



### Barb Elbow Fitting

Quick#	Part#	Thread	Stem øOD	Tube øID	Price
264	GSF-BE-M304	M3	2.7	2.4	\$3.33
265	GSF-BE-M504	M5	2.7	2.4	\$2.09
266	GSF-BE-M506	M5	3.9	4	\$2.09



### Barb Elbow Swivel Fitting

Quick#	Part#	Thread	Stem øOD	Tube øID	Price
267	GSF-BES-G803	G1/8"	2.9	2.4	\$6.85
268	GSF-BES-G804	G1/8"	3.9	4	\$6.85
269	GSF-BES-G806	G1/8"	6.4	5	\$6.85



### Barb T Swivel Fitting

Quick#	Part#	Thread	Stem øOD	Tube øID	Price
272	GSF-BTS-M303	M3	2.9	2.4	\$9.22
276	GSF-BTS-M504	M5	2.9	2.4	\$9.22
277	GSF-BTS-M506	M5	3.9	4	\$9.22
280	GSF-BTS-G803	G1/8"	2.9	2.4	\$9.54
281	GSF-BTS-G804	G1/8"	3.9	4	\$9.53
282	GSF-BTS-G806	G1/8"	6.4	5	\$9.54