Foam Gripper / FGS with medium pitch and self-closing valves



FGS-120-0400

- The FGS-120 series of VACUUM FOAM GRIPPERS represents a modular and versatile solution for handling different products with different sizes, shapes and porosity
- Integrated EJ-LARGE-HF-3 multistage cartridges for high suction flow rate and low energy consumption
- The version with self-closing valves is ideal in applications where objects with different sizes/shapes need to be handled. It allows the user to work with smaller vacuum pumps, reducing consumption while maintaining a high level of vacuum, even when most of the gripper surface area is not engaged



Technical features	
Max feed pressure	0.6 MPa
Temperature range	0 ÷ +50 °C
Weight	3.87 kg
Material	AI, EPDM, NBR, PA12
Noise level	70 dB


Suction flow rate											
Model	Feed pressure	Air consumption		Suction flow rate [NI/s] at different vacuum levels [kPa]					Max vacuum		
	[MPa]	[NI/s]	0	-10	-20	-30	-40	-50	-60	-70	[kPa]
FGS-120-0400-F20-RM-VA-EJL3XX	0.6	5.1	17.7	10.5	7.5	5.1	2.67	1.86	1.53	0.93	-73

Gripping force						
Model	Gripping force [N] at different vacuum levels					
	-30 kPa	-40 kPa	-50 kPa	-60 kPa	-70 kPa	
FGS-120-0400-F20	350	475	600	715	840	

Theoretical gripping force on flat surface, with fully covered gripping surface, safety factor excluded Standard foam thickness: 20 mm



Identification codes Alphanumeric code Description Order code Foam Gripper (120x400 mm), medium pitch, self-closing valves 353020403 FGS-120-0400-F20-RM-VA-EJL3XX

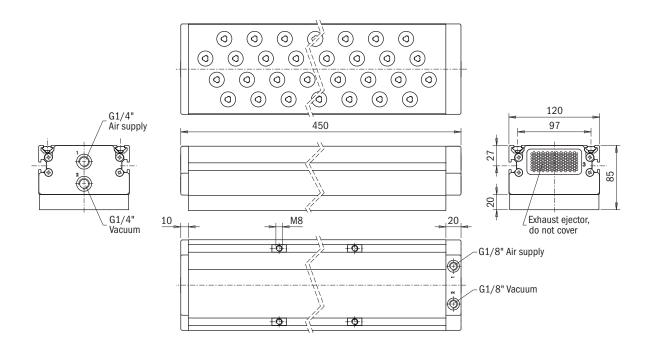

Identification codes						
Alphanumeric code	Spare parts	Order code				
FGS-120-0400-F20-RM	Foam Gripper (120x400 mm), 20 mm-thick foam, medium pitch	353022004				

